




Reduced Costs

Union Type Inj




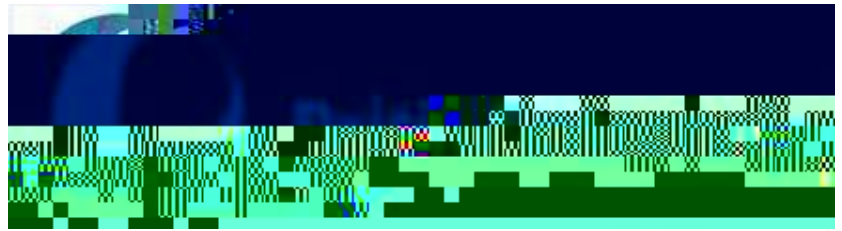




FLYRIE C - HOUSING STYLE 1,1

Provides joint flexibility required in same plane






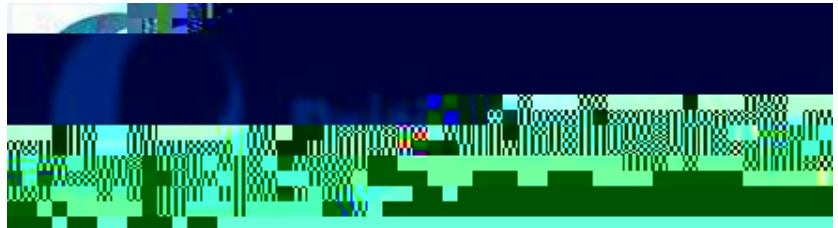



FLEXIBLE CORRUGATED PIPE STYLE 111

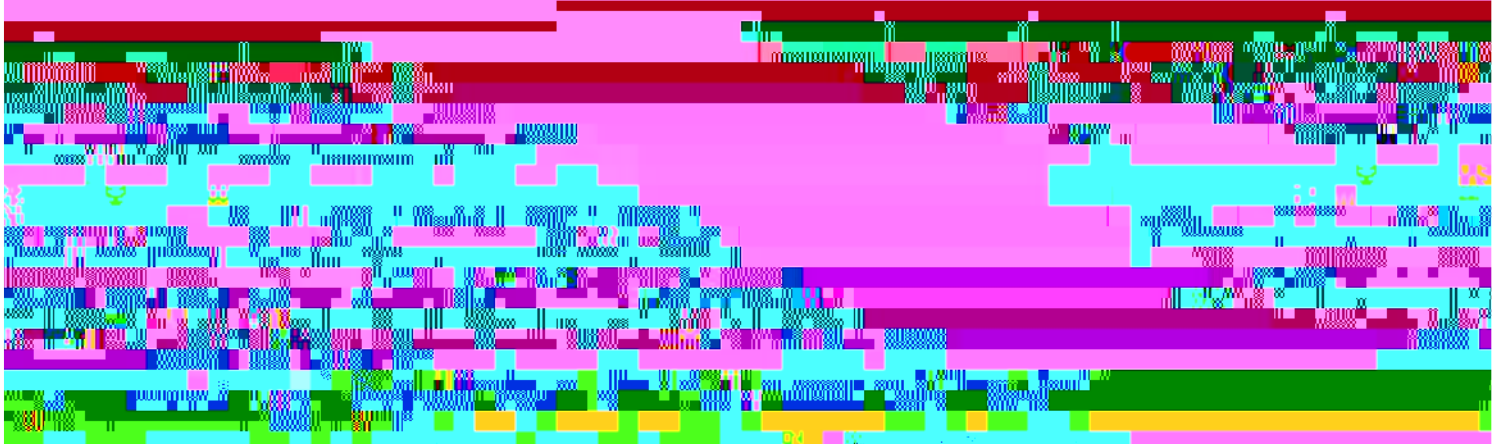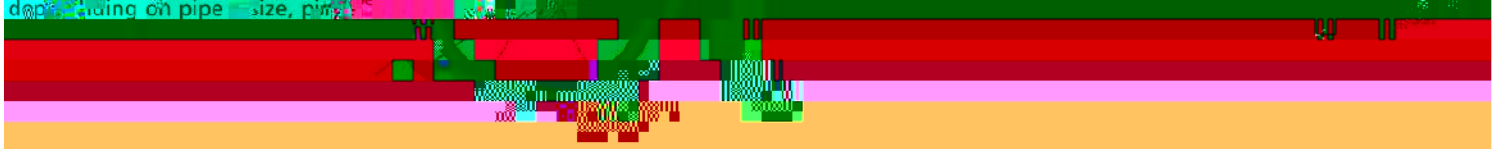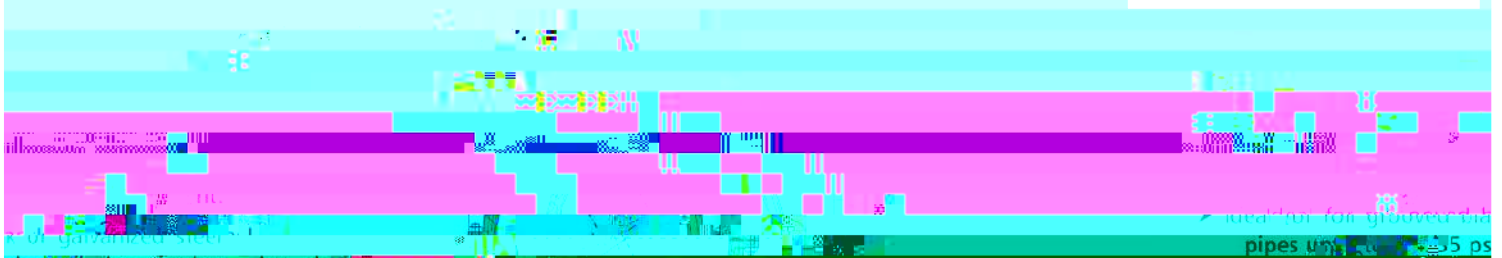

42	0.1947	145	45.75	51.56	2%	0.31	0.69	0
----	--------	-----	-------	-------	----	------	------	---

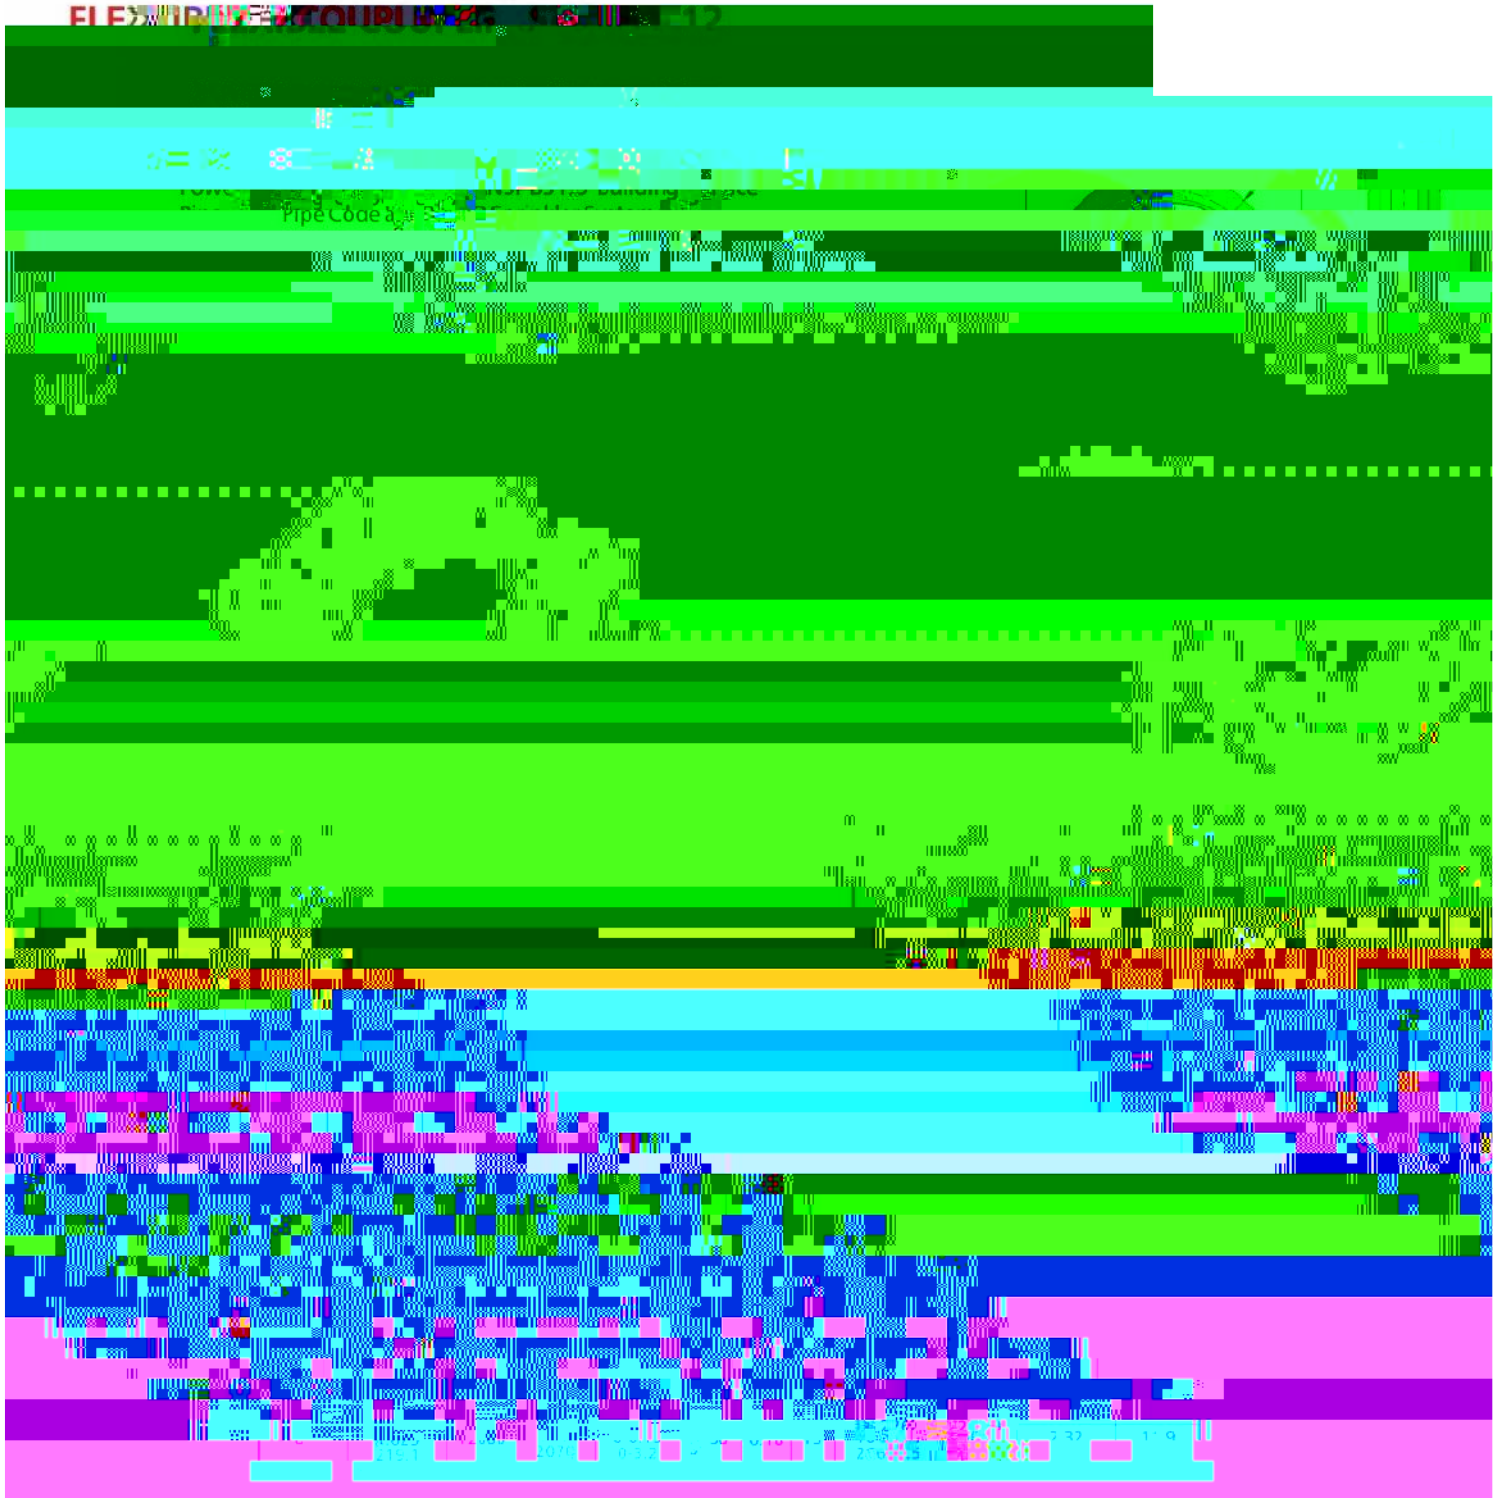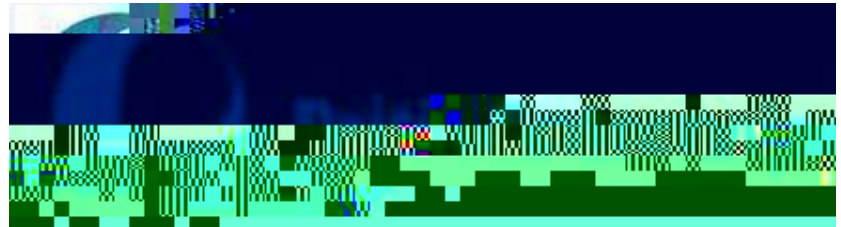




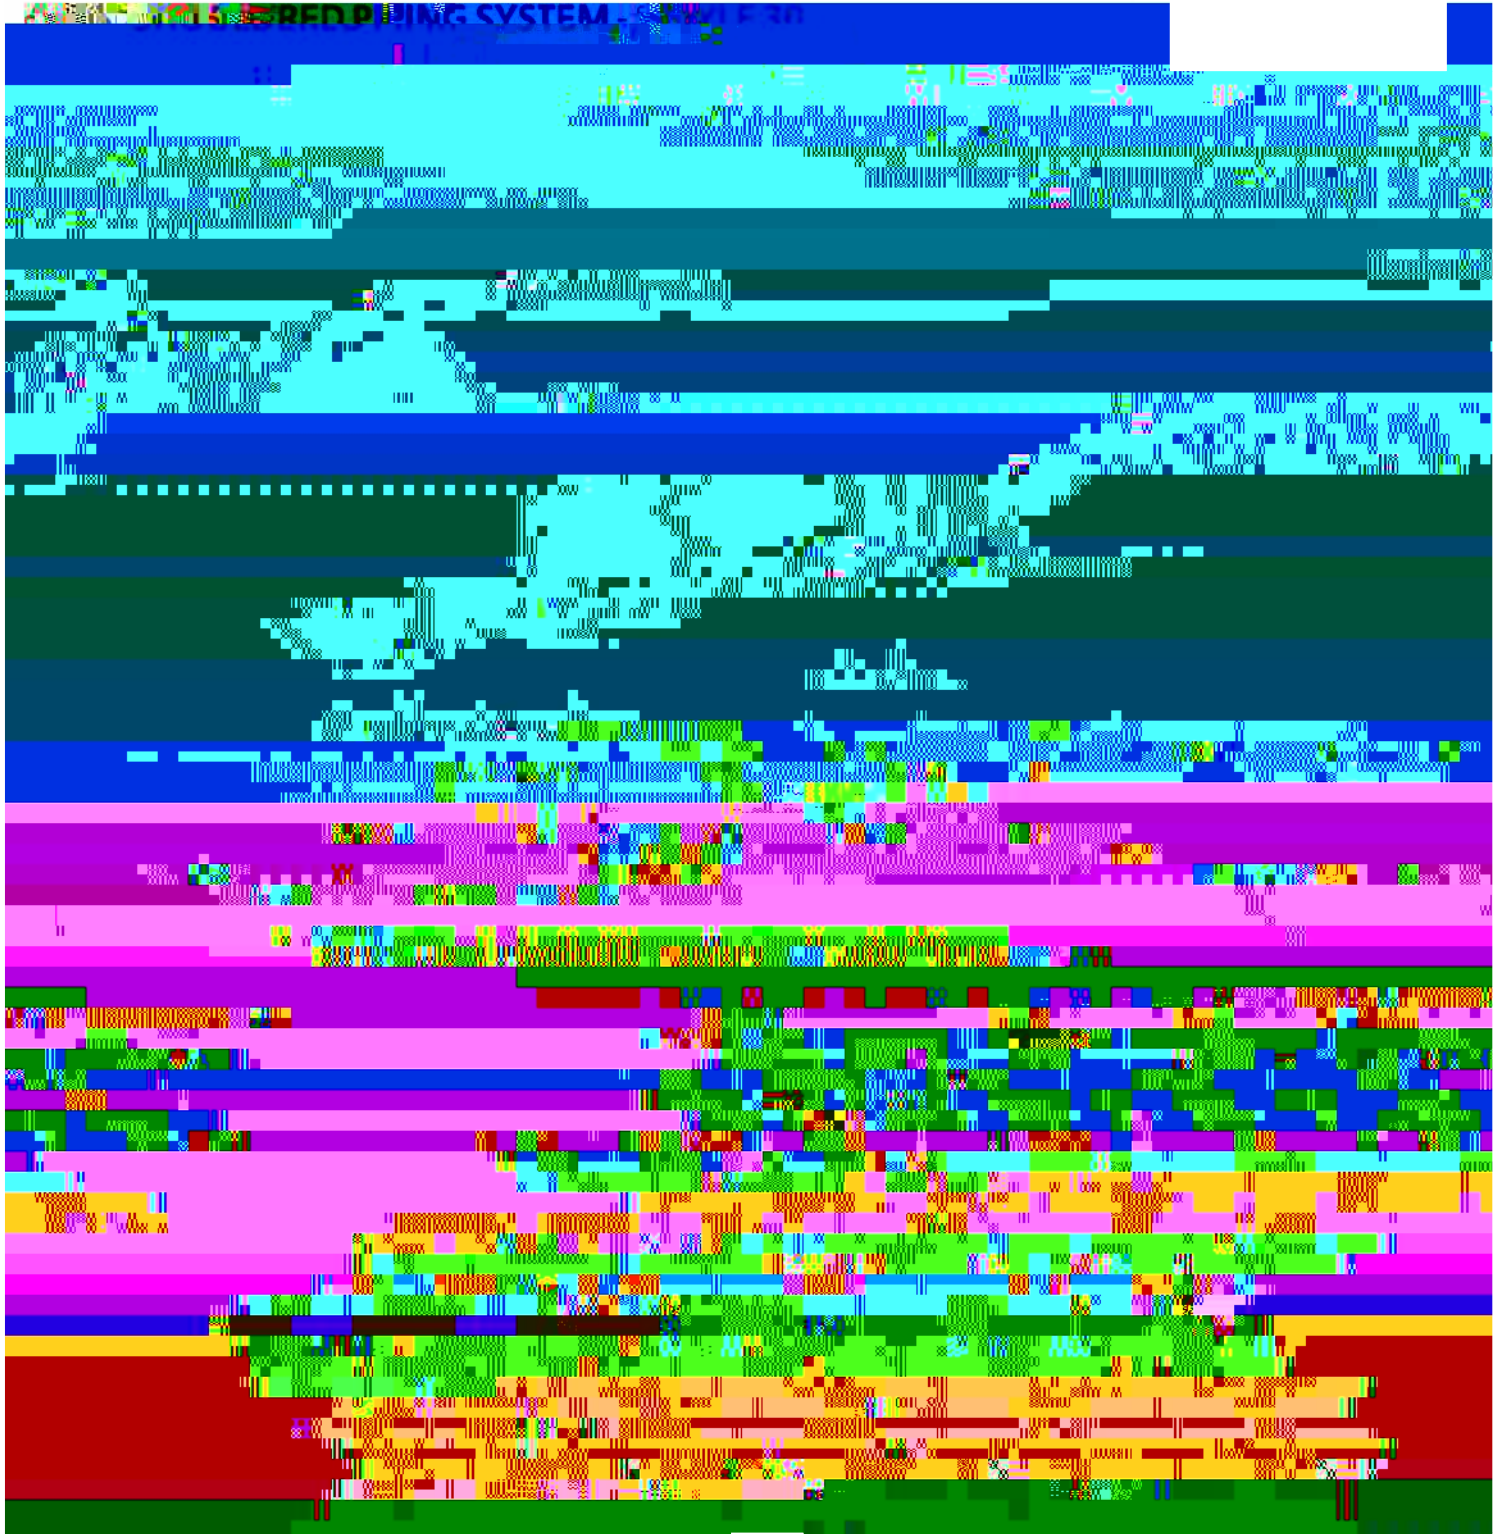
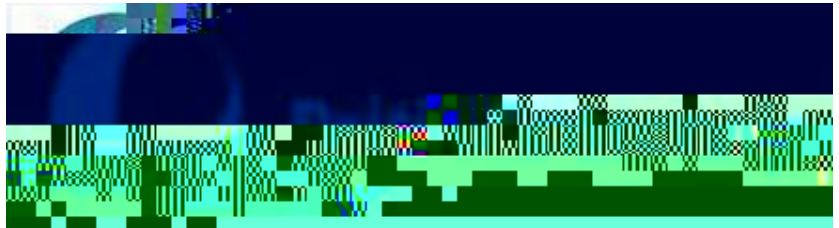


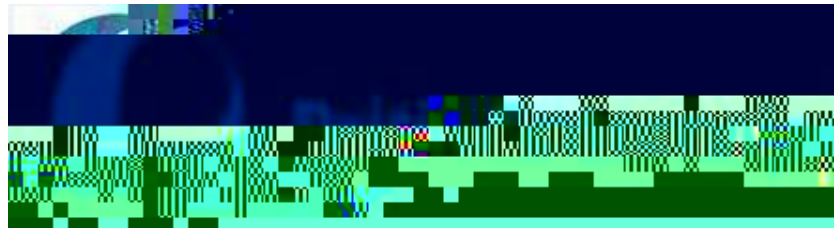

GROOVED FITTINGS, HOPE PATTERN

107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118 & 119

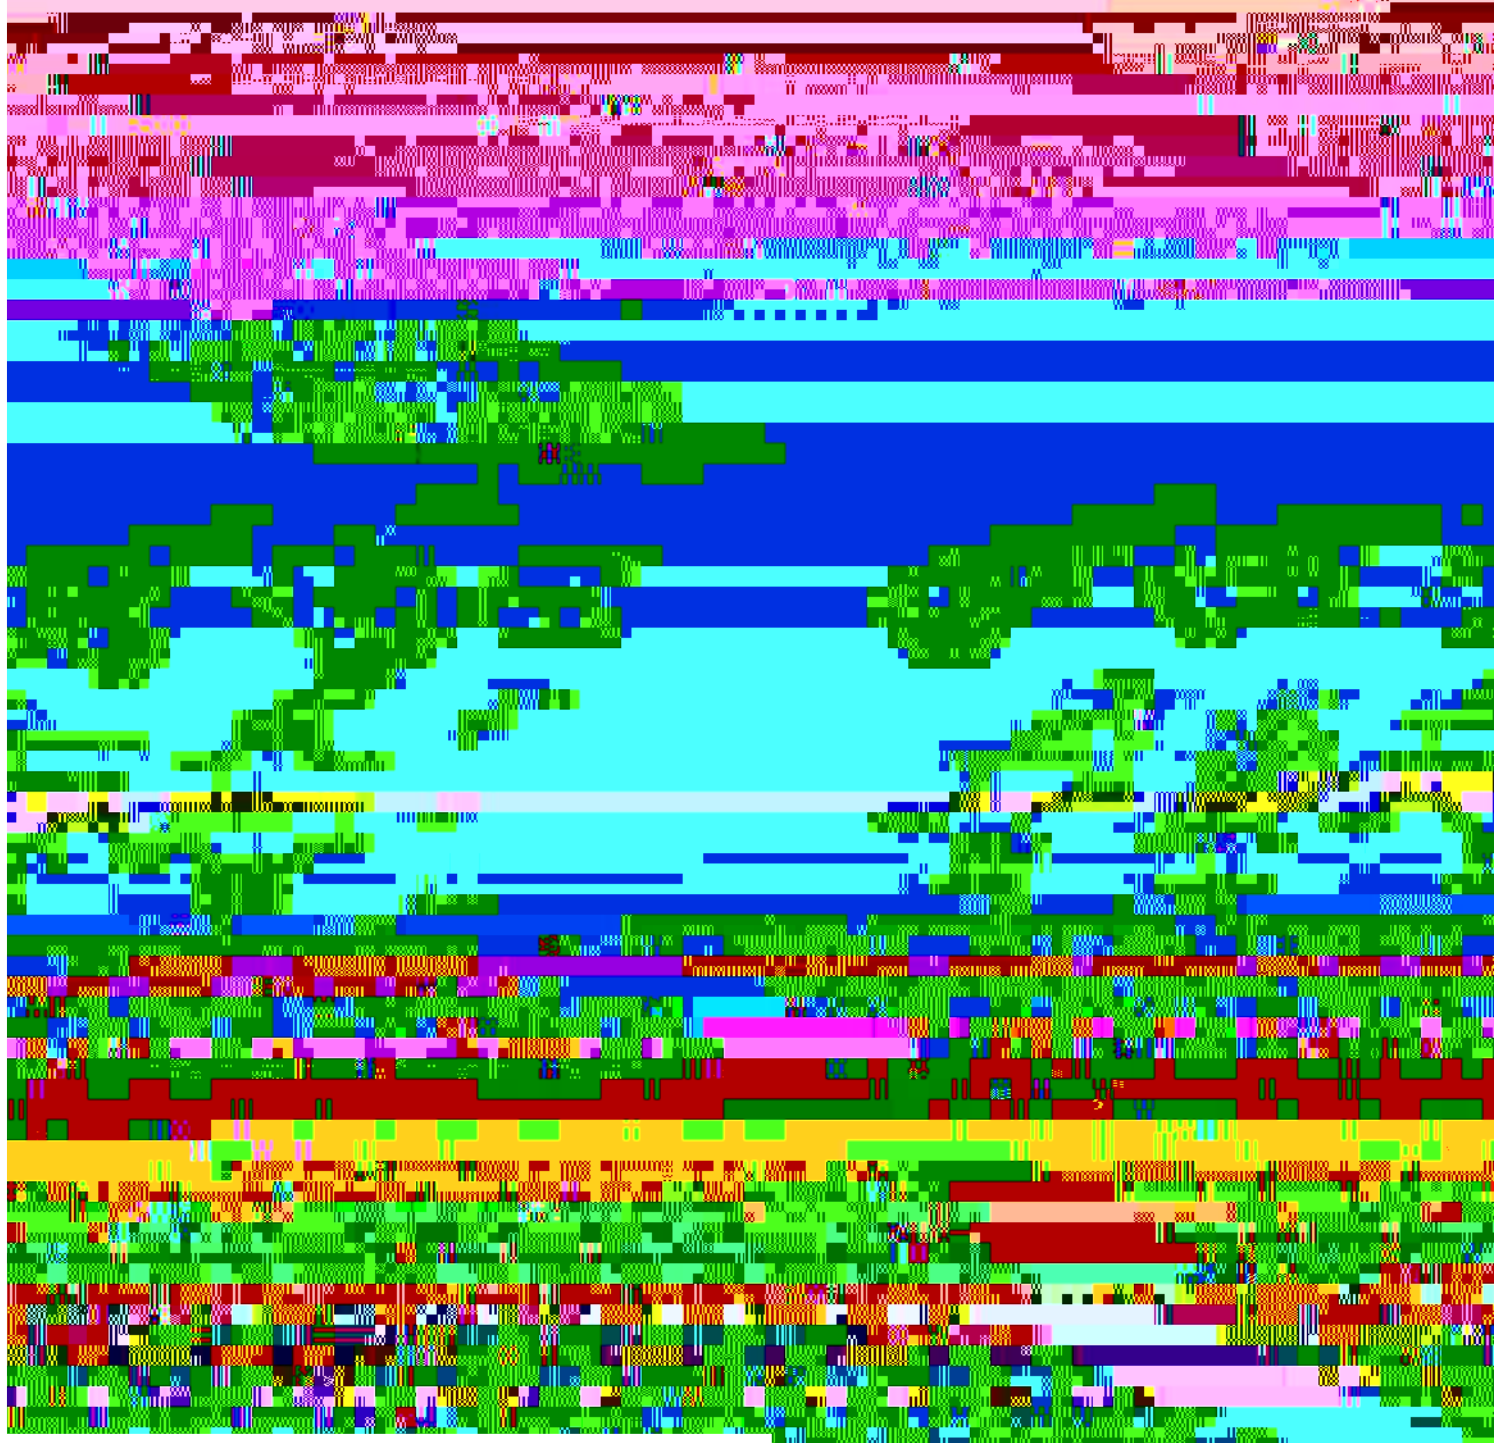

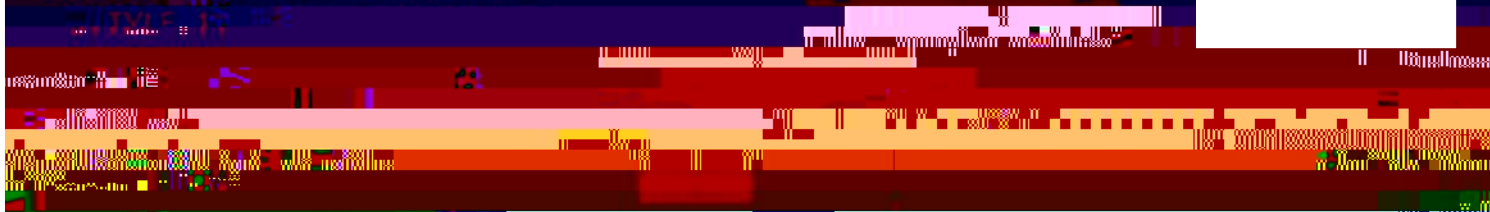

CRACKED END BALL VALVE STYLE 40


Hollnort's patented design provides better flow characteristics in all sizes.

> Valves are available in 1/2" to 24" sizes.

> Dimensions meet API 6D.

> 150# and 300#

> 150# and 300# pressure ratings

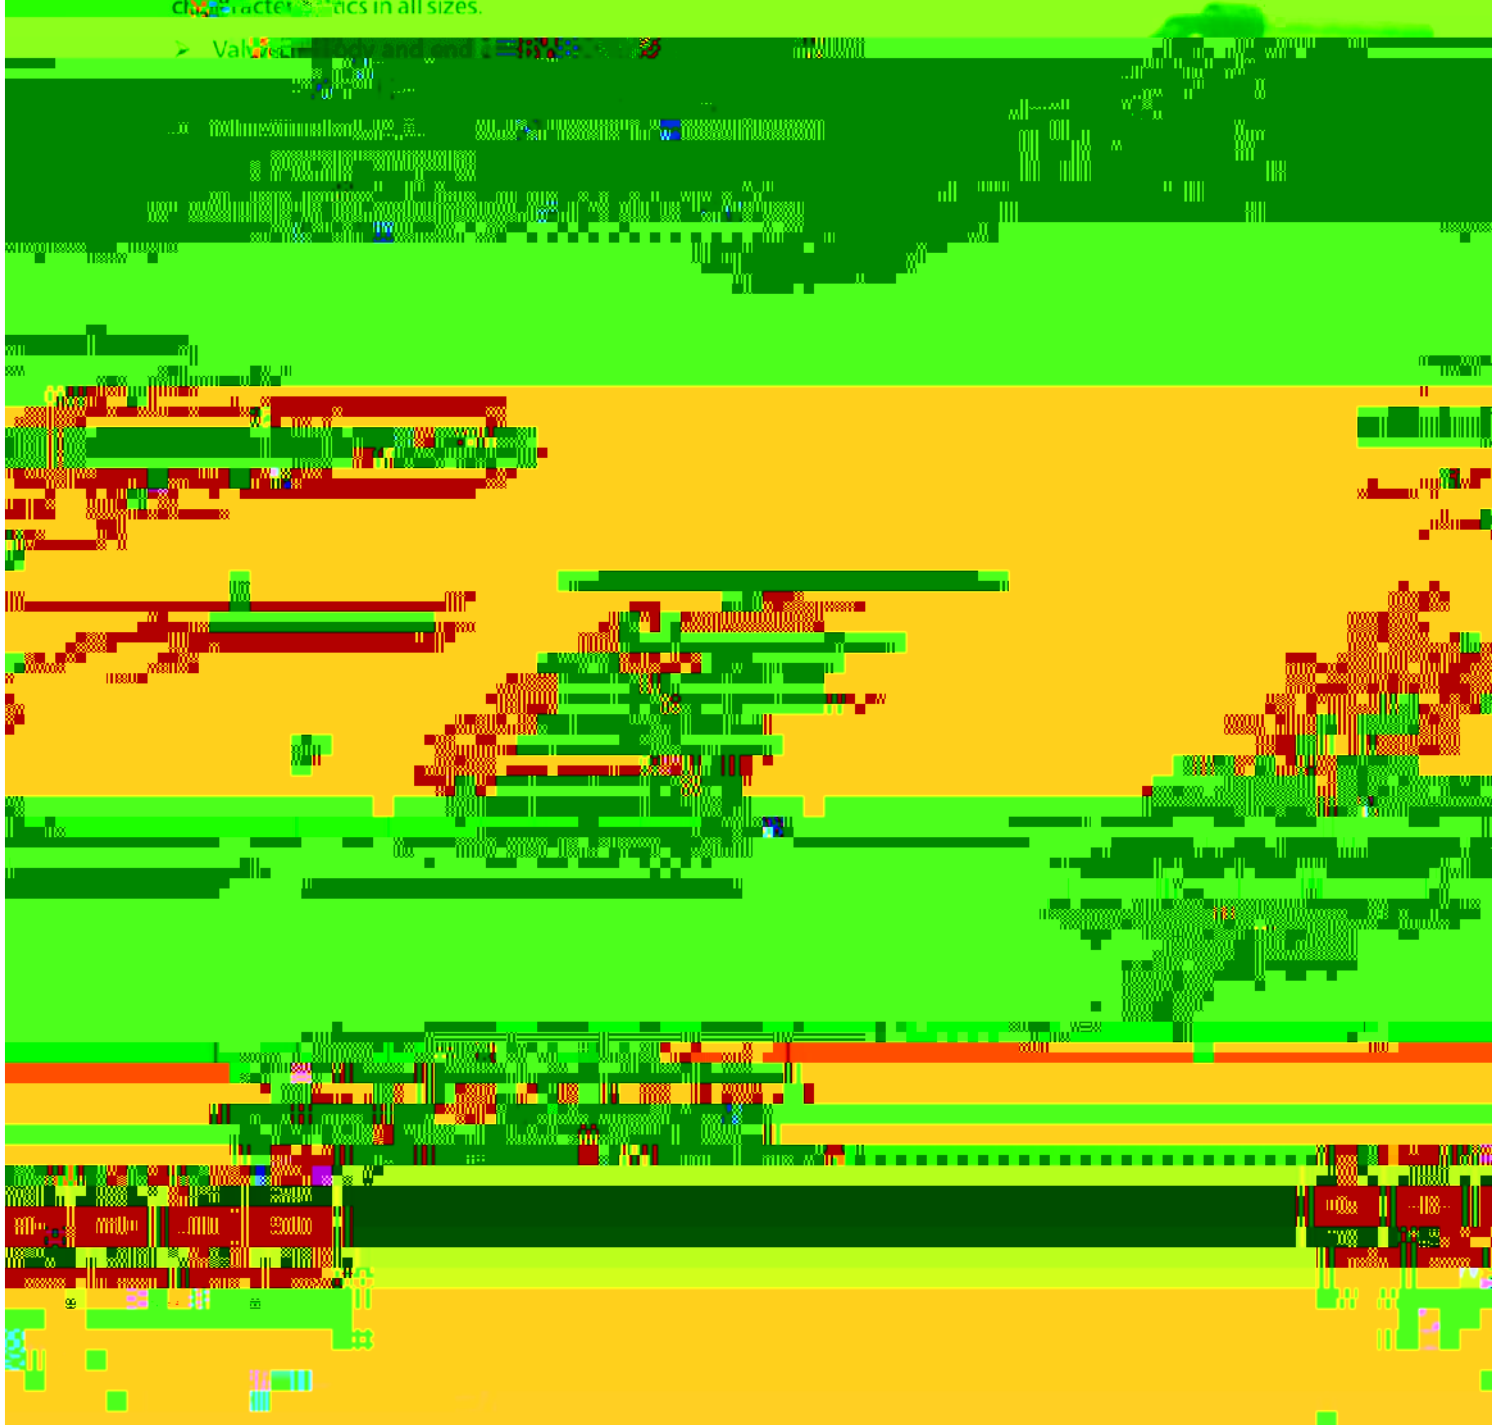

IMPROVED END BUTT TEFLON VALVE

➤ Grooved end for fast, easy installation...

➤ Excellent flow characteristics

➤ Ductile cast iron body



GASKEI DAAT

STANDARDS GASKEI

Clade

EPPM

NITDIL C

Hydroth

Hydroth


Hydroth

Hydroth

Hydroth

W


19700

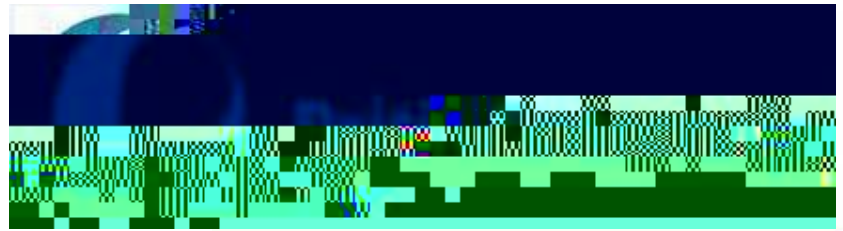



PIPE PREPARATION

10/25/2017

11:00 AM

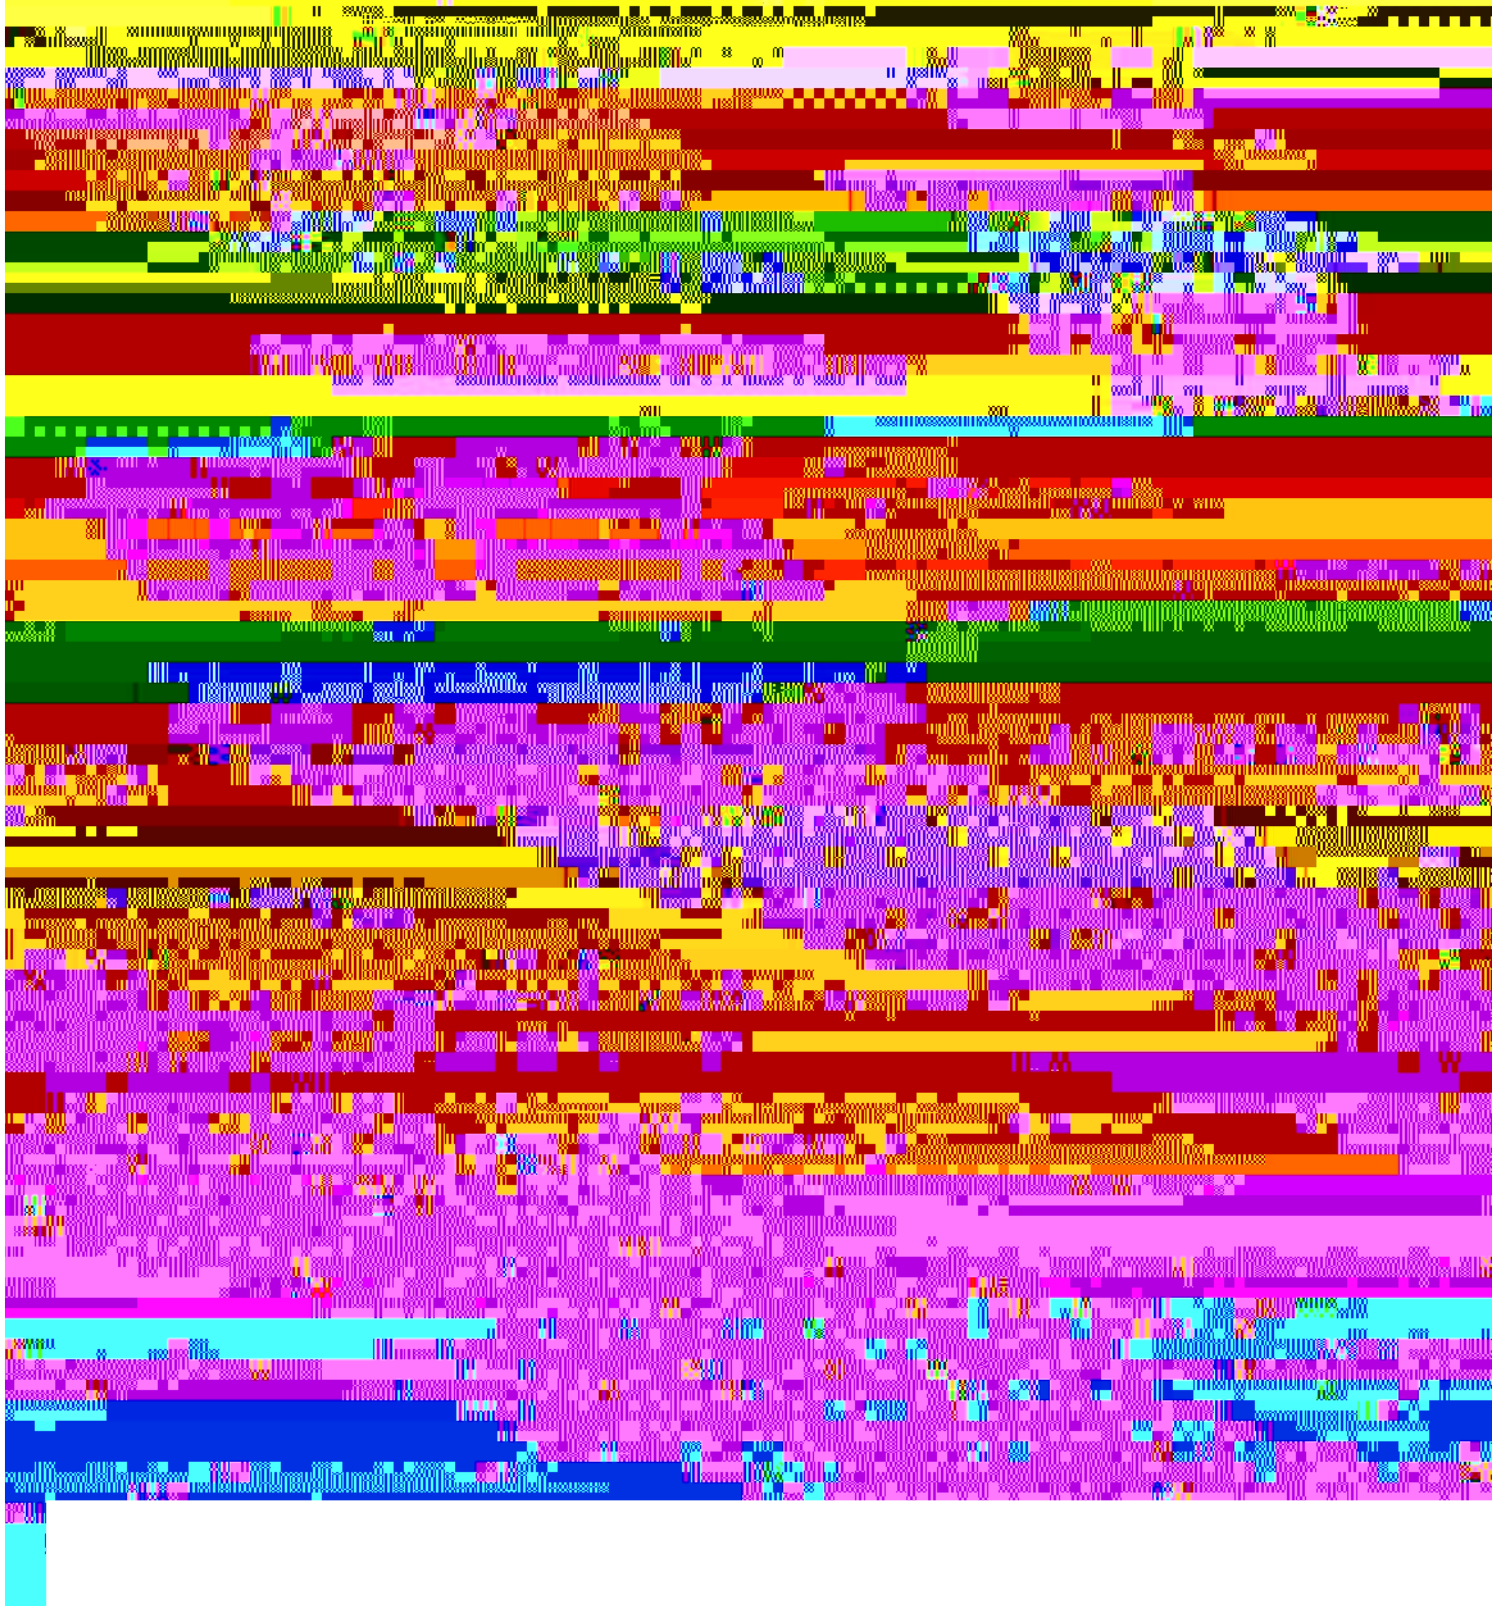

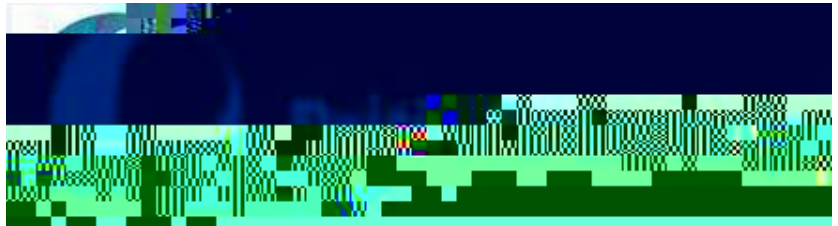

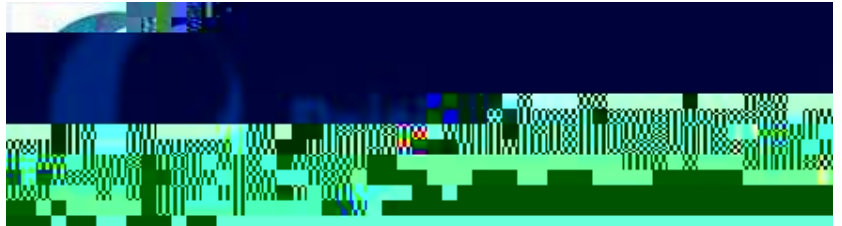

FIRE PROTECTION LISTING IN PROGRESS APPROVAL

NO.	DESCRIPTION	DATE	STATUS	REMARKS
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

